

M-70 & S-70 SERIES

Heavy Duty Water-Saver Spray Nozzles

Precision-made nozzles combining modern and innovative engineering.

Strahman nozzles are often noted as being the best on the market. Designed and built to withstand the most rugged applications, the operator can achieve any type of water stream needed for the job, from a soft spray to a strong, steady stream, simply by applying pressure on the lever arm. This provides a convenient control that immediately shuts off the water when the lever arm is released. The long rubber grip feels comfortable in the hand and the mechanical ease of the trigger spray assures a better cleaning with a lot less effort and hand fatigue.

Available options for both series are:

- Bronze or all Stainless Steel construction
- Renewable and replaceable rubber covers in Black, White, and Red
- Comfortable, long handle grip for whole hand placement
- Stainless steel seat design prevents nozzle seat leakage
- Low Flow Option is available
- Solid, Steady Stream and Fine, Soft Spray nozzles are available
- One Year Limited Warranty



M-70
Bronze



S-70
Stainless Steel



RUBBER COVER - BLACK



RUBBER COVER - RED



RUBBER COVER - WHITE

| NOZZLE FLOW TEST | | |
|-----------------------|-----------------|-----------------|
| WATER PRESSURE PSI | FLOW (GPM) | |
| | STANDARD NOZZLE | LOW FLOW NOZZLE |
| 20 | 3 ¼ | 2 ¼ |
| 30 | 4 ¼ | 2 ¾ |
| 40 | 5 ½ | 3 ¼ |
| 50 | 5 7/8 | 3 ¾ |
| 60 | 6 ¾ | 4 ½ |
| 70 | 7 ½ | 4 ½ |
| 80 | 7 ¾ | 4 7/8 |
| 90 | 8 ¼ | 5 |
| 100 | 9 | 5 ½ |

Maximum water temperature: 200°F (93°C)


Maximum working pressure: 150PSI

Note: Not suitable for steam service



M-70 & S-70 SERIES

Heavy Duty Water Saver Spray Nozzles

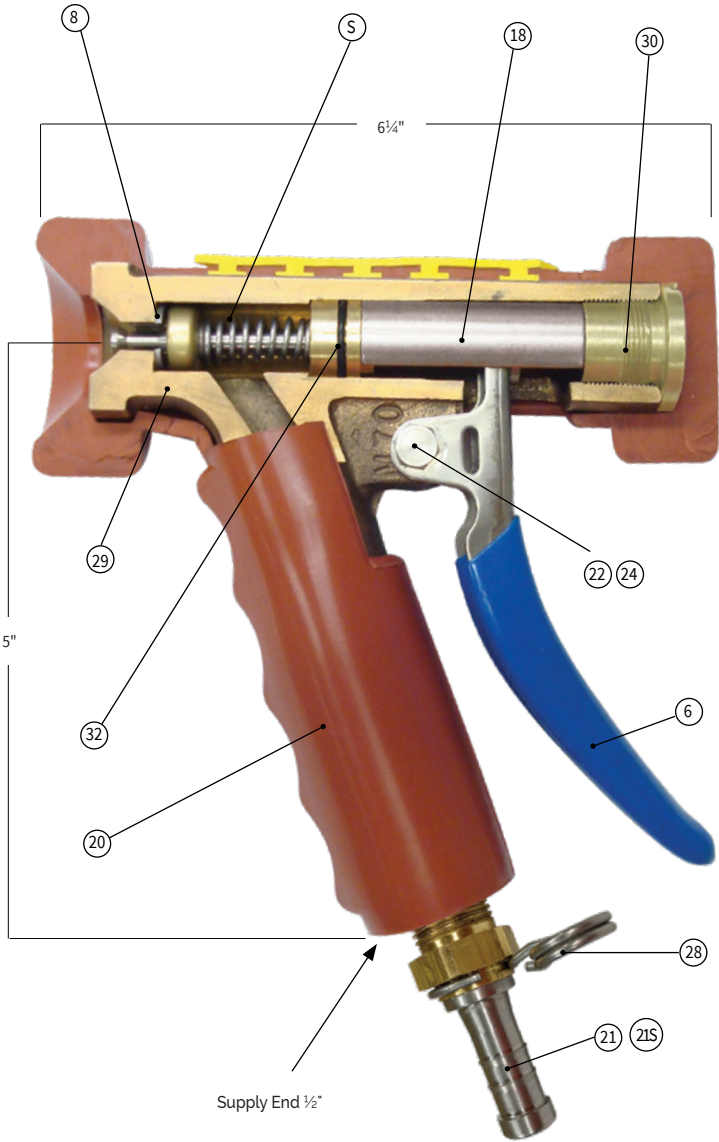

DIMENSIONS: 6 1/4" W X 5" H
WEIGHT: 2 3/4 LBS. (W/O ADAPTER)

| ITEM NO. | DESCRIPTION | M-70 BRONZE ORDER No. (MATERIAL) | S-70 STAINLESS STEEL ORDER NO. (MATERIAL) |
|-----------------------------|--|----------------------------------|---|
| PARTS LIST | | | |
| 8 | SEAT | WSSEAT (SS 303) | WSSEAT (SS 303) |
| | SEAT FOR LOW FLOW | WSSEATLF (SS 303) | WSSEATLF (SS 303) |
| 18 | NOZZLE CAGE (SET OF 6) | WSCASS (SS 304) | WSCASS (SS 304) |
| 30 | LOCK SCREW | LSCRBR (BR C3600) | LSCRSS (SS 303) |
| 22 | LEVER ARM BUSHING | LARMBU (NYLON) | LARMBU (NYLON) |
| 24 | LEVER ARM SCREW | WLSLSCR (SS 303) | WLSLSCR (SS 303) |
| | LEVER ARM NUT | WLSLNU (SS 303) | WLSLNU (SS 303) |
| 6 | LEVER ARM - BLUE | WSLARMBLUE (SS 304) | WSLARMBLUE (SS 304) |
| 29 | MAIN BODY | WSM70BODY0005 (BRASS C83600) | S70BDBUSEATSS (SST 304) |
| 20 | NOZZLE COVER - BLACK | M70COVRBLACK | M70COVRBLACK |
| | NOZZLE COVER - RED | M77COVRRED | M77COVRRED |
| | NOZZLE COVER - WHITE | M75WCOVR | M75WCOVR |
| S | REPLACEABLE CARTRIDGE | M70CARTBR (BR & SSTL) | S70CART (SSTL) |
| 31 | STEM GUIDE (INSTALLED WITH CARTRIDGE) | WSSGUIDBR (BR & SSTL) | WSSGUIDSS (SSTL) |
| 32 | BODY SEALING O RING (INSTALLED W/CARTR.) | ORNG018EA | ORNG018EA |
| OPTIONAL ACCESSORIES | | | |
| 21S | 3/4" FGHT SWIVEL ADAPTER | G075BR (BR36000) | SG0075SS (SS 303) |
| | 1/2" BARB SWIVEL ADAPTER | SWADAP0500BR (BR36000) | SWADAP0500SS (SS 303) |
| | 5/8" BARB SWIVEL ADAPTER | SWADADAP0063BR (BR36000) | SWADADAP0063SS (SS 303) |
| | 3/4" BARB SWIVEL ADAPTER | SWIVADAP0075BR (BR36000) | SWIVADAP0075SS (SS 303) |
| 28 | LOCK RING | WSLRNG (SS302) | WSLRNG (SS302) |
| 21 | 3/4" FGHT RIGID ADAPTER | WSADAPTERCOMPLETE0003 (BR36000) | G050SS (SS 303) |
| | 1/2" BARB RIGID ADAPTER | BARB0050BR (BR36000) | - |
| | 5/8" BARB RIGID ADAPTER | BARB0063BR (BR36000) | - |
| | 3/4" BARB RIGID ADAPTER | BARB0075BR (BR36000) | - |

Published 08.30.22



StrahmanGroup.com

WORLD HEADQUARTERS
2801 Baglyos Circle, Bethlehem, PA 18020
p: +1 877 787 2462 | +1 484 893 5080
e: strahman@strahman.com

USA | FRANCE | GERMANY | HONG KONG | CHINA