

Vari-Spray[®] Ozone




Benefits of Strahman's new Vari-Spray[®] Ozone spray nozzle:


- ◆ Infinite choice of spray patterns (from a soft hollow cone to a powerful solid stream)
- ◆ Horizontal flow ideal for ozonated water. Ozone stays in solution, there by reducing need to compensate with higher initial ppm.
- ◆ This nozzle works well with ozonated water both internally and externally, and will also tolerate internal detergents which are compatible with Viton elastomers and HDPE plastics.
- ◆ Available as a High Flow, 5.5 gpm at 60 psi (20L @ 4.1 BAR) or Low Flow, 1.25gpm @ 60 psi (4.7L @ 4.1 bar)
- ◆ All stainless steel operating parts with fluoroelastomer seals.
- ◆ Weight Approx. 1.2 lbs. (0.54 kg)
- ◆ 7.8-20 UNEF Inlet Connection, NPT and Garden Hose adapters available.

FORCE and FLOW RATE

VARI-SPRAY OZONE HI-FLO		
PSI	FORCE IN OZ @ 12"	GPM
30	15	3
40	17	4 ½"
50	26	5
60	30	5 ½"
70	36	6
80	42	6 ½"
90	46	6 ¾"
100	50	7 ¼"

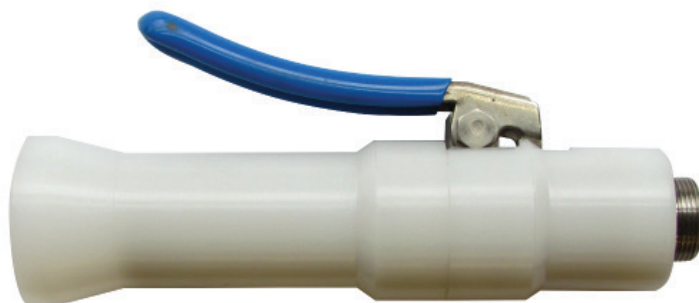

Features of Strahman's new Vari-Spray[®] Ozone pre-rinse spray nozzle:

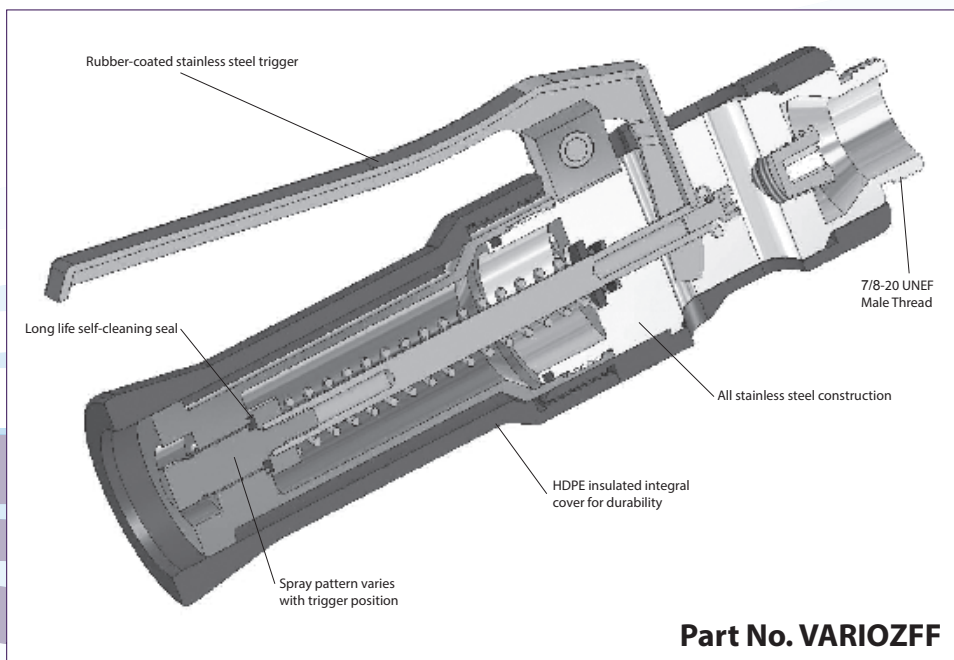

Part No. VARIOZFF

The Strahman Family of Pre-Rinse Products Includes:

pre-rinse spray nozzles, handles, hoses, hose reels and Pivot Pro swivel connectors. Designed for use in restaurants, hotels, supermarkets, and all commercial kitchens, food serving and food preparation applications.



Last Updated: May 2017



World Headquarters

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

www.strahmanvalves.com ♦ strahman@strahman.com

France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

Germany

Kirchstrasse 16, D-77855, Achern, Germany

Tel: 49 (0) 7841-6846530

Fax: 49 (0) 7841-6846531



ISO 9001
QMS-BAI Global